



*professional tractor powered mowing equipment*

# FlailDek S2™

*The Trimax FlailDek has set the standard in out-front flail mowing since 1994 and continues to lead the way. With innovative design and maintenance features and the ability to perform in virtually any conditions, the FlailDek Series 2 is the most cost effective out-front flail mower available.*



*Lifts high for climbing kerbs or loading onto trailers.*

versatility and safety standard

...just add tractor!

On sports grounds, parks or fine turf the FlailDek Series 2 distributes clippings evenly leaving an attractive finish. It is equally capable of handling very harsh conditions including long wet grass or tall stalky growth without the need for any adjustment. The high tip speed lets the operator travel quickly, allowing larger areas to be finished faster.

The full width rear roller prevents unsightly scalping and permits the edge of the mower to be run along kerbs and banks without fear of blade strike. The floating linkage allows the mower to accurately follow the most extreme ground contours.

*Fine turf – no problem.*



### Power saving blades

One of the many secrets of the FlailDekS2's success is the exclusive Trimax Gamma flail. Formed from high tensile alloy steel and hardened for long life, the straight cutting edge produces a perfectly even cut. The aerodynamic profile reduces horsepower requirements, yet generates sufficient draught to prevent clogging and lifts the grass for a clean cut. The low power requirements are a huge advantage, especially in heavy conditions.

### Safety

The FlailDekS2 is inherently safe as all moving parts are well guarded while clippings and debris are discharged evenly in a downwards direction behind the mower. This makes the FlailDekS2 ideal for public areas such as schools, parks and roadsides.



### Your trustworthy partner

The Trimax FlailDekS2 is engineered for long life. The body, made from high tensile steel, features monocoque construction and has been developed in conjunction with a rigorous destructive testing programme. The rotor is dynamically balanced at the factory and rugged castor mountings are an integral part of the body.

Ease of maintenance is also one of Trimax's key design parameters. The drive belts can be tensioned and the bearings greased without removing the transmission cover. For hassle free operation the cut height can be quickly altered using the positive height adjusters.

Trimax's attention to detail results in a mower that will provide you with years of reliable service in a wide spectrum of applications.

*The FlailDekS2 is ideal for a wide range of mowing applications.*



# Specifications

The manufacturer has a policy of continuous improvement, therefore specifications may change without notice.


DESIGNED & MANUFACTURED IN  
NEW ZEALAND

- (A) **Unique mounting system**  
Allows considerable float.  
Lifts high for climbing kerbs and trailer loading.  
Adjustable.
- (B) **Castor mounts**  
Integrated into mower body.  
Extremely strong.
- (C) **Integral gearbox**  
Eliminates drive belt idler pulleys.
- (D) **Reliable belt drive**  
Provides shock protection.
- (E) **Positive height adjustment**
- (F) **Rear height adjustment**  
Incorporates height adjustment indicators.
- (G) **Full width rear roller**  
Stripes and prevents scalping.  
Roller bearing protection kit standard.
- (H) **Body shape**  
Profile minimises stone bruising.

	F2 135	F2 155	F2 185
Cutting Width	1.36m (53")	1.52m (59")	1.83m (72")
Overall Width	1.56m (61")	1.72m (68")	2.05m (80")
Overall Length	1.10m (43")	1.10m (43")	1.10m (43")
Overall Height <sup>1</sup>	0.37m (15")	0.37m (15")	0.37m (15")
Cut Height Range	12-102mm (½"-4")	12-102mm (½"-4")	6-96mm (¼"-3¾")
Approx Weight <sup>2</sup>	185kg (405lb)	210kg (462lb)	225kg (495lb)

<sup>1</sup> Height over body pan given at 30mm (1½") cutting height  
<sup>2</sup> Weight given without mounting brackets

- (I) **Body**  
High tensile steel.  
Monocoque construction.  
High strength and low weight.
- (J) **Blades**  
Trimax exclusive Gamma™ flails.  
High mass.  
Aerodynamic power-saving design.  
Long life.
- (K) **Castor assemblies**  
Ruggedly constructed.  
Pivot parts replaceable.

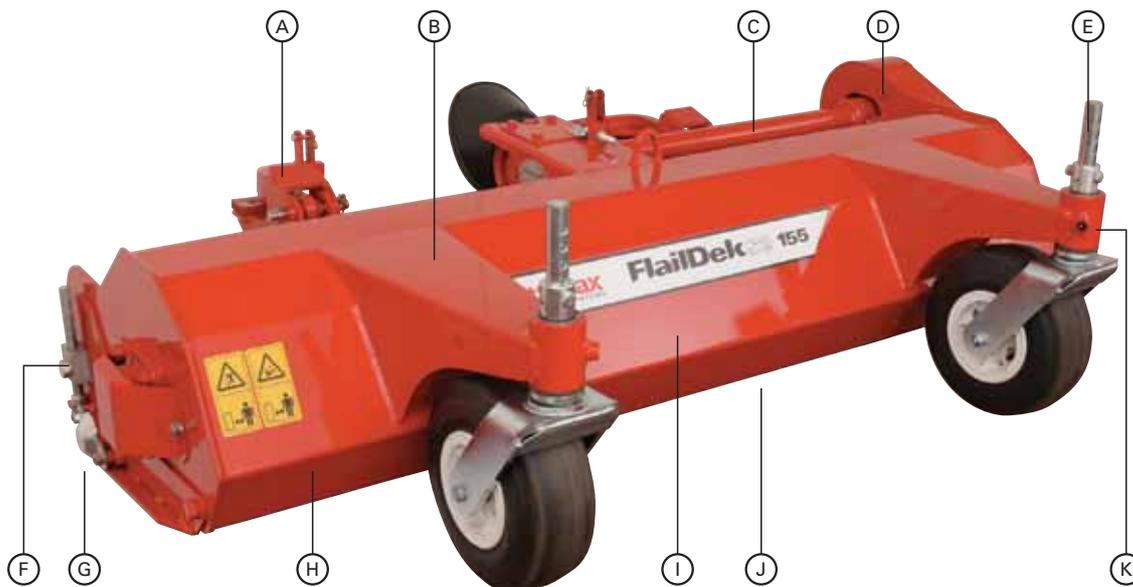

**WARNING:** Machinery shown in this publication may have protective guards removed for demonstration purposes. Trimax strongly recommends the use of safety guards and shields during normal operation to reduce the risk of property damage, serious bodily injury or even death from objects thrown out by, or from contact with the cutting blades.

insist on Trimax  
**Genuine Parts**



[www.trimaxmowers.com](http://www.trimaxmowers.com)

#### New Zealand/Australia

70 Maleme Street  
PO Box 2150, Tauranga 3001  
New Zealand

phone: +64 7 541 0411 (SALES/ADMIN)  
phone: +64 7 543 1897 (PARTS)  
fax: +64 7 541 0412  
email: sales@trimaxmowers.co.nz

#### United Kingdom

Unit 11B, Hill Farm Estate, Irthlingborough Road  
Little Addington, Kettering, Northamptonshire  
NN14 4AS, United Kingdom

phone: 01933 652235 (SALES/ADMIN)  
phone: 01933 652246 (PARTS)  
fax: 01933 652254  
email: info@trimaxmowers.co.uk

Your nearest authorised dealer:

